


STANDARD ARRIVAL CHART
INSTRUMENT (STAR) - ICAO

TRANSITION ALT
5000

RNAV (GNSS) STAR RWY 34
KITITILÄ AERODROME
KITITILÄ, FINLAND

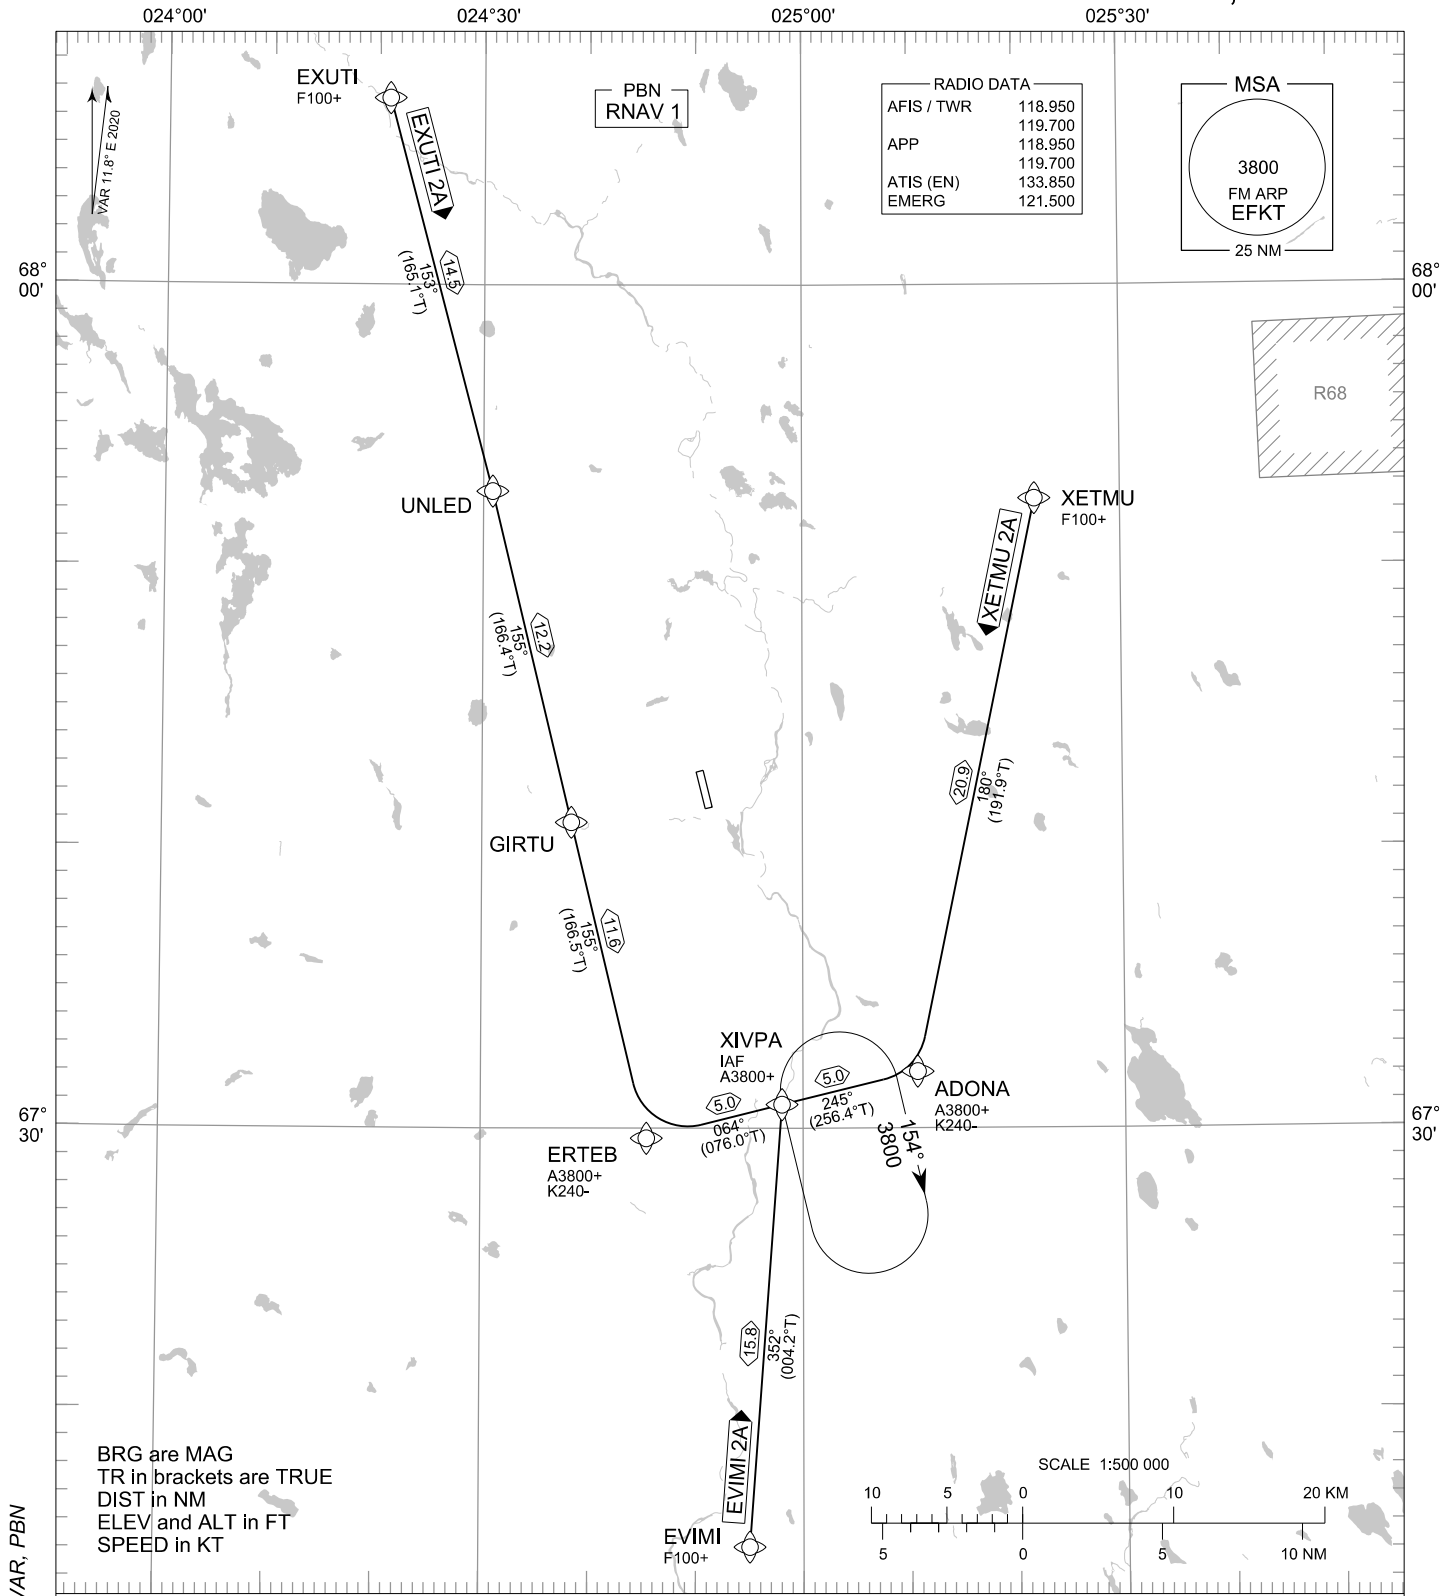

RNAV STAR RWY 34
EVIMI 2A EXUTI 2A XETMU 2A

DME/DME OPS: NOT SUPPORTED

ROUTES: RNAV PROC CODING ON THE VERSO OF THE CHART
ATC WILL GIVE DESCENT CLEARANCES

WPT CONSTRAINTS: ALT / FL / SPEED CONSTRAINTS MUST ALWAYS BE FOLLOWED AS
PUBLISHED UNLESS EXPLICITLY CANCELLED BY ATC

CD OPS: BY ATC CLR IF TFC PERMITS. PLAN CD PATH ACCORDING TO STAR

RCF: SELECT TRANSPONDER CODE 7600

RNAV STAR HAS BEEN GIVEN AND ACKNOWLEDGED: FOLLOW THE
STAR TO THE RESPECTIVE RWY AND EXECUTE IAP AND LAND

AREA MNM ALT: SEE AMA INDEX AIP ENR 6.1 - 3

CHG: MAG VAR, PBN

EFKT RNAV STAR RWY 34										
RTE NAV SPEC	SEQ NR	P/T	WPT		MAG	GEO TR	DIST NM	Constraints		
			ID	Flyover				LVL	LVL	Speed
EVIMI 2A RNAV 1	010	IF	EVIMI	-	-	-	-	F100+		
	020	TF	XIVPA	-	352°	004.2°T	15.8	A3800+		

EXUTI 2A RNAV 1	010	IF	EXUTI	-	-	-	-	F100+		
	020	TF	UNLED	-	153°	165.1°T	14.5			
	030	TF	GIRTU	-	155°	166.4°T	12.2			
	040	TF	ERTEB	-	155°	166.5°T	11.6	A3800+		K240-
	050	TF	XIVPA	-	064°	076.0°T	5.0	A3800+		

XETMU 2A RNAV 1	010	IF	XETMU	-	-	-	-	F100+		
	020	TF	ADONA	-	180°	191.9°T	20.9	A3800+		K240-
	030	TF	XIVPA	-	245°	256.4°T	5.0	A3800+		

RNAV Holdings									
ID	INBD TR	INBD MAG	Turn Direction	Speed	MNM HLDG LVL	TIME	DIST NM		
XIVPA	346.1°T	334°	Right	K230-	A3800	1 MIN	-		

WPT COORD
SEE PAGE EFKT AD 2.15 - 1