TRANSITION ALT
5000

IVALO, FINLAND

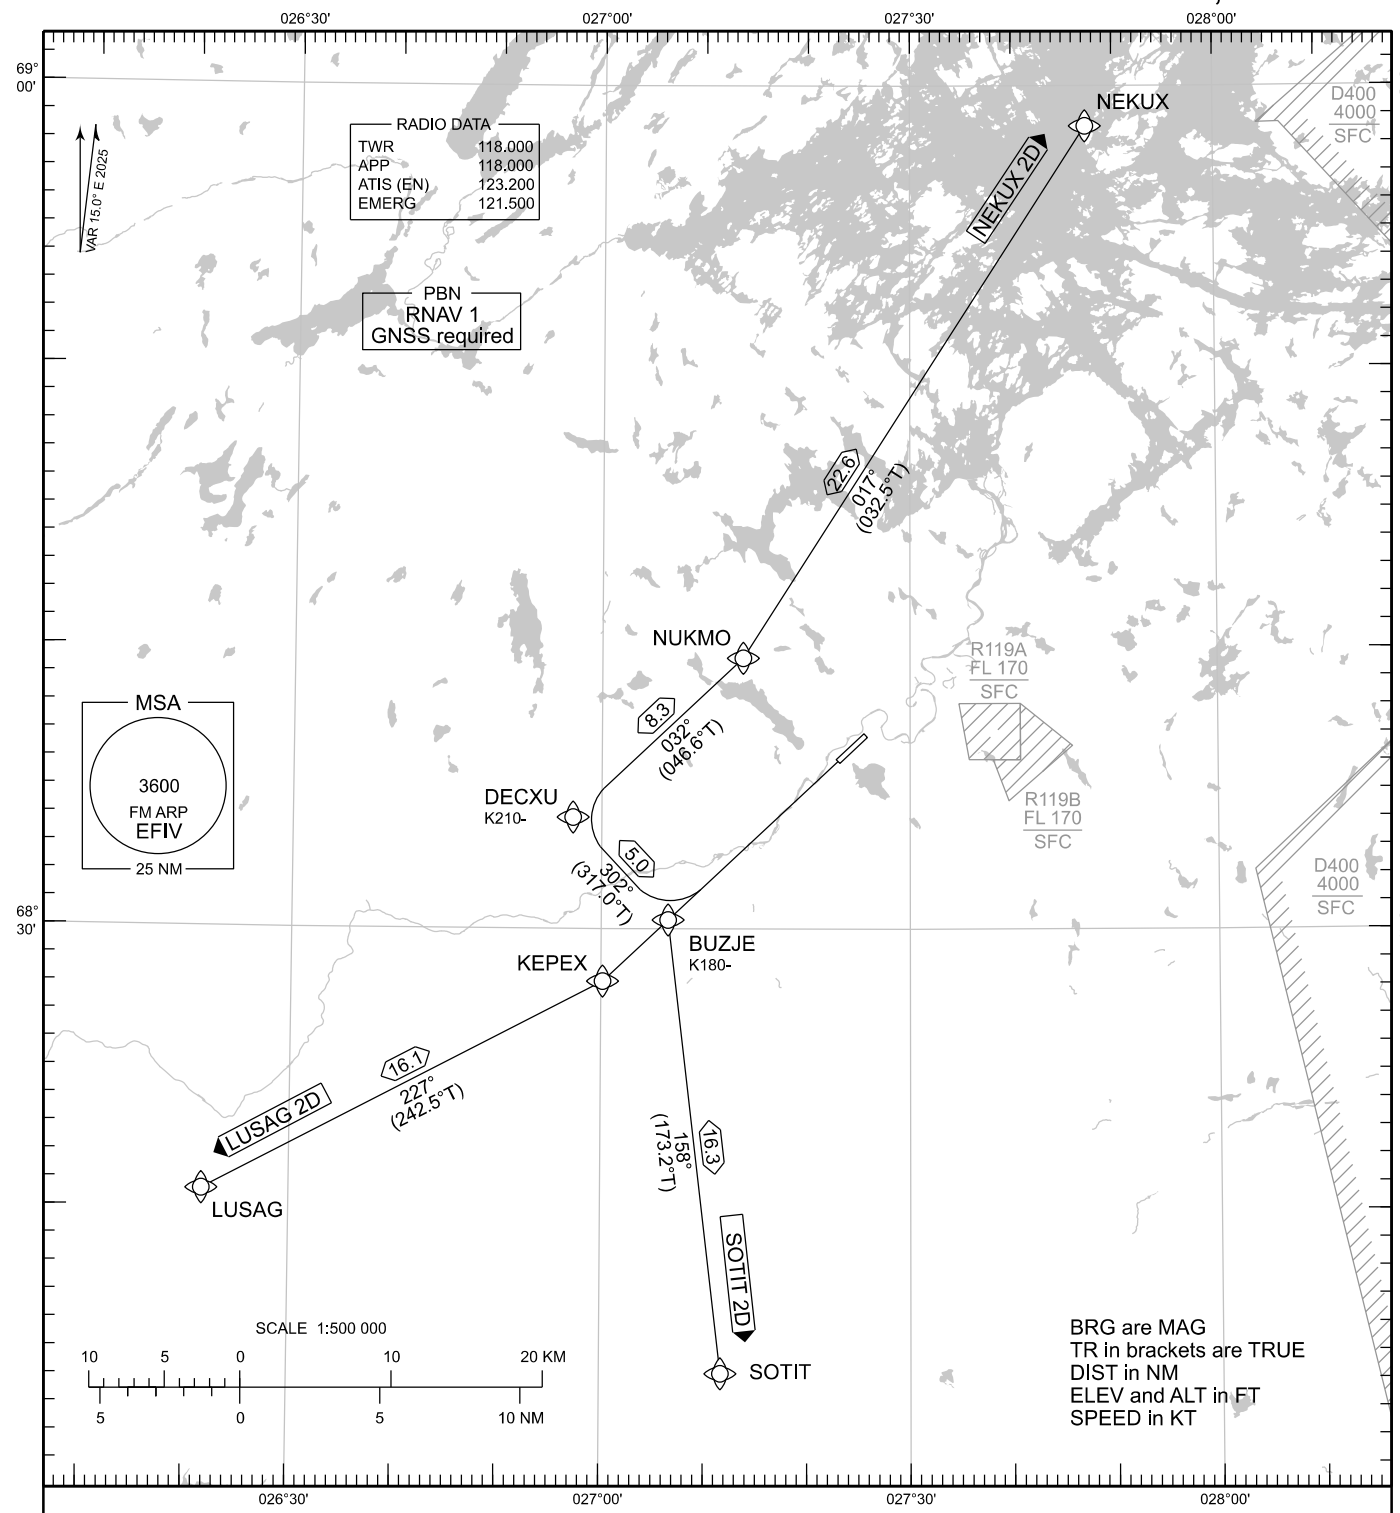

RNAV SID RWY 22

LUSAG 2D NEKUX 2D SOTIT 2D

DME/DME OPS:	NOT SUPPORTED
ROUTES:	RNAV PROC CODING ON THE VERSO OF THE CHART
SQUAWK:	WHEN LINING UP SQUAWK THE ASSIGNED CODE
INITIAL CLIMB:	MNM TURNING ALTITUDE ACCORDING TO RTE CODING. CLOSE-IN OBSTACLES EXIST, SEE EFIV AD 2.10 - 5
NOISE ABATEMENT:	AFTER TAKE-OFF CLIMB AS RAPIDLY AS PRACTICABLE TO AT LEAST 2000 FT ABOVE AD ELEV PUBLISHED SID ROUTES ARE ALSO MINIMUM NOISE ROUTINGS
AREA MNM ALT:	SEE AMA INDEX, AIP ENR 6.1 - 3
CPDLC:	EXPECT FIRST CPDLC DATA LINK AUTHORITY TO BE EFIN

CHG: MSA

© FINTRAFFIC ANS

EFIV RNAV SID RWY 22										
RTE NAV SPEC	SEQ NR	P/T	WPT		MAG	GEO TR	DIST NM	Turn Direction	Constraints	
			ID	Flyover					LVL	Speed
LUSAG 2D RNAV 1	010	CA	-	-	212°	227.0°T	-		A1750+	
	020	DF	KEPEX	-	-	-	-			
	030	TF	LUSAG	-	227°	242.5°T	16.1			
NEKUX 2D RNAV 1	010	CA	-	-	212°	227.0°T	-		A1750+	
	020	DF	BUZJE	-	-	-	-			K180-
	030	TF	DECXU	-	302°	317.0°T	5.0	R		K210-
	040	TF	NUKMO	-	032°	046.6°T	8.3			
	050	TF	NEKUX	-	017°	032.5°T	22.6			
SOTIT 2D RNAV 1	010	CA	-	-	212°	227.0°T	-		A1750+	
	020	DF	BUZJE	-	-	-	-			K180-
	030	TF	SOTIT	-	158°	173.2°T	16.3			

WPT COORD
SEE PAGE EFIV AD 2.15 - 1

© FINTRAFFIC ANS